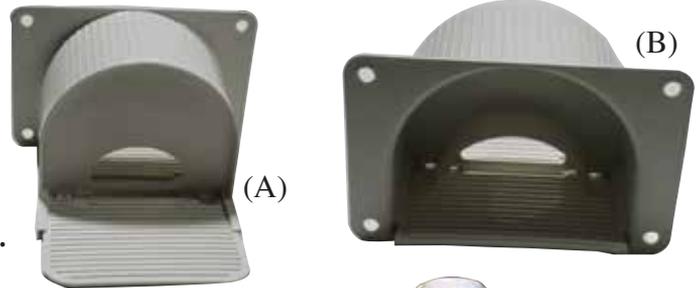# INSTRUCTIONS

Assemble the Tunnel

Insert/snap the large traction floor in the front of the tunnel (A) and insert/snap the small traction floor into the inside of the tunnel (B).
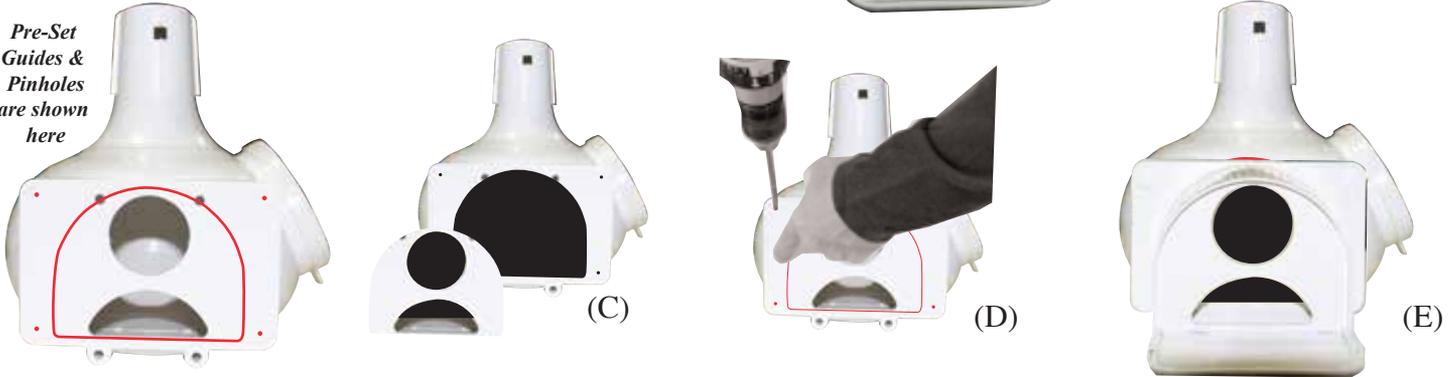
UTRS　　**UTC**

Adding a Tunnel

To add a tunnel to your gourd, remove the front of the entrance by using the guides (C). Each corner of the entrance has a pre-set pinhole; using a 0.25" dia. drill bit , drill all four corners (D). Attach your tunnel with the four (4) push-in snaps (E).

(A)

(B)

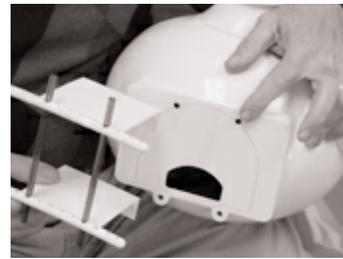*Pre-Set Guides & Pinholes are shown here*

(C)　(D)　(E)

OPTIONS AVAILABLE (Not Included)

Adding a Plate Entrance
Each Corner of the gourd entance has a pre set pinhole. Using a 0.25" dia drill bit, drill all four corners. Attach your plate entrance with push-in snaps.

Adding an Owl Guard
To add an owl guard, put the two small rods in the holes on the porch with perch, and then attach the second porch with perch to the top of the small rods. Attach your owl guard with two push-in snaps to the pre-drilled holes on the bottom of the gourd entrance, and then attach the top of the owl guard to the pre-drilled holes at the topof your gourd entrance with your two push-in snaps

Add a Porch
Before adding a porch , see options 1 through 3.
To add the porch,, line up the bottom holes of the Porch to the holes below the gourd entrance. Insert a push-in snap through each of the bottom openings of the Porch and into the Gourd's corresponding holes. When completely entered, the snaps willl secure the porch in place.

Adding a Cooling Cap
To get ventilation when usiing the cooling cap you must remove the top of the gourd using a hammer, tap the top of the gourd neck until the top falls out, (Step 1). Put the cooling cap over the top of your gourd (step 2 and 3).

1　　2　　3

For Big Bo & Bo Gourds Using the Tunnels

Take the entrance and remove the round & crescent entrances allong the red line.

One the middle has been removed attach the tunnels

1-800-764-8688　　www.skmfg.com

S&K MANUFACTURING, INC　*ver 41920131*